

FREE LINE 40 - *Partition*

Feathery-flexible with plug connection

The fully upholstered partitions with their sound-absorbing core are extremely easy to use and therefore offer the utmost flexibility for rapid rearrangement of workspaces and subdivision of rooms. Intelligent connective elements permit simple, tool-free dismantling of the partitions, while the easily attached central foot offers additional stability. Free Line – For an inspiring environment, diverse applications and optimized room acoustics. The Free Line partitions on offer measure 1800 mm in height and 1200 mm in width. Other partition heights up to 1200 mm are also available with widths of up to 1800 mm. With a choice of 15 different fabric qualities divided into five price groups, along with an extraordinary selection of structures and colour nuances up to quilted design, Free Line offers architects and planners almost limitless design possibilities.

The easy way to optimize room acoustics

The 40 mm thick partition walls are also ideal for individual positions and linear positions of any kind. For this purpose there are available medium feet in 4 sizes, matching the respective wall width. These are available, as well as the connecting elements, in two powder coatings, in anthracite gray RAL 7016 and in white aluminium RAL 9006.



Data Free Line *Partition*

Flexible plug connection

Wall thickness 40 mm

Acoustic filling lightweight panel

Sound-absorbing according to DIN EN ISO 354

Connecting element metal powder coated

100% recyclable


Fabric covering surface

Filler FSC certificate

Organisable with hanging parts

Connecting elements for L-, T-, and X-connection
as well as 135° and 180° linear connection


Detail view




X-position



Flexible plug connection
Z-position

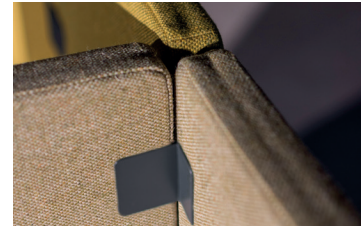


T-position



Central foot B (light version)



Flexible plug connection
T-position

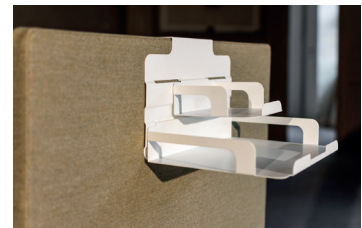

Organisational accessory

Connecting options



linear



90°



135°



X




T-1



T-2

Central feet - recommended wall width:



Central foot B
light version up to 800 mm wall width



Central foot S
up to 800 mm wall width



Central foot L
up to 1200 mm wall width



Central foot XL
up to 1800 mm wall width

FREE LINE 40 mm

Sound absorption coefficient
as per DIN EN ISO 354

125 Hz	as 0,18
250 Hz	as 0,33
500 Hz	as 0,60
1000 Hz	as 0,69
2000 Hz	as 0,54
4000 Hz	as 0,80

Bewerteter Schallabsorptionsgrad

aw 0,55 (H). DIN EN ISO 354 Prüfzeugnis