

MOOD LINE 55 - *Partition with magnet connection*

Flexible and at any time rearrangeable

In its fully upholstered version, the 55 mm thick Mood Line is also available as a partition system. Brilliantly simple – because no tools are required – this partition system offers great scope for different designs, allowing users to create landscapes and perfectly sound-insulated islands of peace and quiet. Invisible, ingeniously positioned magnetic connections allow the partitions to be rearranged flexibly at any time. The partition walls in the system can be connected with one another directly or using the connection posts. This affords planners and architects an unlimited choice of designs and unprecedented flexibility.



Data Mood Line

Partition with magnet connection

Wall thickness 55 mm

Version fully upholstered

Highly sound-absorbing according to
DIN EN ISO 354

Filler B1 flame retardant according to
DIN 4102-1

Filler OEKO-TEX Standard 100

Organisable with hook-in elements

Optionally also with an acoustic filling made of pure
new sheep's wool - 100% sustainable

Partition walls incl. central stand plate with a 8 mm
height

Detail view



Full screen with flexible magnetic connection



Flexible magnetic connection T-position



Flexible magnetic connection project workplace



Full screen with magnetic connection without connecting post



Full screen with magnetic connection with connecting post




Flexible magnetic connection U-position

Connecting options

Magnet and connecting post

excluding the connecting post

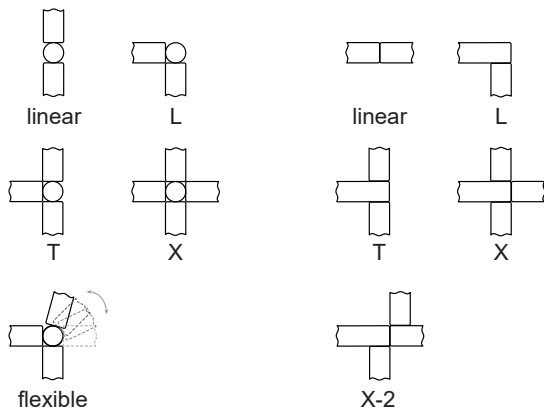

Best acoustic qualities thanks to intelligent multi-layer wall construction

The acoustic quality of the Mood Line partitions is the result of intensive research and continuous development. The dimensions and the materials used in the partitions' intelligent, multi-layer construction can be adapted to the acoustic requirements of each specific room. This not only means an optimum performance in terms of sound absorption but also Mood Line 55 with magnetic connection makes a great contribution to noise insulation at the workplace.

MOOD LINE 55 mm

Sound absorption coefficient
as per DIN EN ISO 354

125 Hz	as 0,33
250 Hz	as 0,59
500 Hz	as 0,77
1000 Hz	as 0,87
2000 Hz	as 0,94
4000 Hz	as 0,96

Rated sound absorption coefficient

aw 0,80 (H). DIN EN ISO 354 test certificate