

## Mood Line 55/40 - On-cabinet element

### High-performance and flexible applicable

Mood Line on-cabinet elements are available in two design versions. Fully upholstered, with rounded corner with a radius of 20 mm or in the rigid angular version with internal profiled material, alternatively powder-coated. Available in 17 fabric collections - divided into 5 price groups - and with more than 500 colours, they are sources of inspiration for a creative and at the same time highly sound-absorbing room structure. There are 10 fabric collections available as quilting fabric. Whether in wall thickness 55 mm or 40 mm, positioned on sideboards or on a workbench, they always contribute to a visual and acoustic shielding in the immediate working environment. The on-cabinet elements are available in the heights 380, 530 and 680 mm. With each of 7 standard widths, up to 2000 mm and in addition also in individual customization, can be responded to any cabinet or desk size and a variety of arrangements. The elements are equipped with a flat central stand plate.




---

### Daten Mood Line 55/40 On-cabinet element

Wall thickness 55 mm (alternatively 40 mm)

Fully upholstered design - alternatively with internal profiles fabric-covered or powder-coated RAL 7016 anthracite gray and RAL 9006 white aluminum

Base plate in the middle, powder-coated  
Anthracite gray RAL 7016 / white aluminum RAL 9006

Highly sound-absorbing according to DIN EN ISO 354


Filler B1 flame retardant according to DIN 4102-1

Filler Standard 100 by OEKO-TEX®

Optional organizational accessories

Optionally with an acoustic filling  
made of sheep's wool - 100% sustainable

## Detail view



Solitary with inner fabric profil



On-cabinet element with organisational accessory




Solitary fully upholstered with quilting



Organisational accessory - brochure loop



Organisational accessory - coat hook

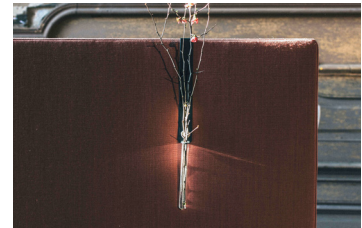

Organisational accessory - test tube holder

## Mood Line 55 mm

Sound absorption coefficient  
ap per DIN EN ISO 354

125 Hz	ap 0,33
250 Hz	ap 0,59
500 Hz	ap 0,77
1000 Hz	ap 0,87
2000 Hz	ap 0,94
4000 Hz	ap 0,96

Rated sound absorption coefficient  
aw 0,80 (H). DIN EN ISO 354 test certificate

## Mood Line 40 mm

Sound absorption coefficient  
ap per DIN EN ISO 354

125 Hz	ap 0,21
250 Hz	ap 0,37
500 Hz	ap 0,60
1000 Hz	ap 0,69
2000 Hz	ap 0,75
4000 Hz	ap 0,88

Rated sound absorption coefficient  
aw 0,65 (H). DIN EN ISO 354 test certificate