

PUR12 Frame

Harmoniously clear shapes and valuable materials touch the senses and move the thoughts. Whether covered with fabric or with digital printing, the wall absorbers with an elegant frame are highly sound absorbing and achieve very good results in the frequency range of human speech. The high-quality processed absorbers are available in five frame versions - painted in the colours anthracite, silver and white as well as with a solid oak and walnut frame. In combination with 12 fabric collections PUR12 Frame becomes a harmonious design element for creating expressive rooms with personality and character.

PUR12 Frame is available in 5 different formats. As a square with the external dimensions 746 x 746 mm. As a standing rectangle with a height of 746 mm and a width of 386 mm as well with a height of 1132 mm and a width of 746 mm. As a lying rectangle with a height of 386 mm and a width of 746 mm as well with a height of 746 mm and a width of 1132 mm.



Data PUR12 Frame

Absorber core in wall thickness 40 mm with high-quality wooden frame

Highly sound absorbing according to DIN EN ISO 354

Absorber B1 flame retardant according to DIN 4102-1

Absorber Standard 100 by OEKO-TEX®

Fabric-covered surface

Wooden frame, 40 mm depth natural or lacquered


Optional with UV offset printing (4 fabric collections)

Incl. height adjustment fastening set


Frame design



Anthracite frame




Special brass painted frame

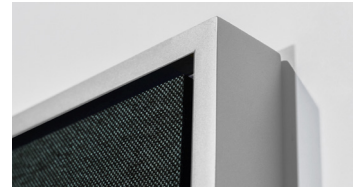

Silver frame

Standard sizes and weights in kg for 40 mm wall construction

Breite \ Höhe	386	746	1132
386	-	2,5	-
746	2,5	4,3	8
1132	-	8	-

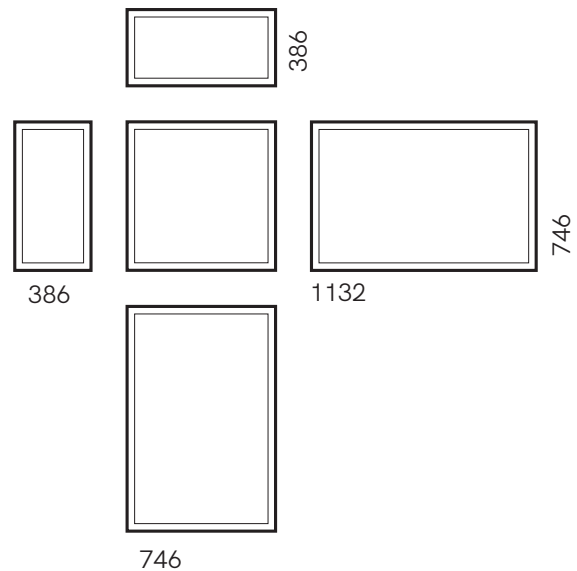

PUR12 Frame

Sound absorption coefficient
ap per DIN EN ISO 354

125 Hz	ap 0,19
250 Hz	ap 0,63
500 Hz	ap 0,99
1000 Hz	ap 1,10
2000 Hz	ap 1,11
4000 Hz	ap 1,02

Rated sound absorption coefficient
aw 0,90 (H). DIN EN ISO 354 test certificate