AOS
AKUSTIK OFFICE
SYSTEME GMBH

Silence Point TouchDown

Silence Point is a versatile product family with the best acoustic properties, developed and optimized over many years. The modular system is broad and ranges from the classic museum bench to various sofa variants to complete work islands with or without a roof.

Seeing, hearing, feeling, when these three sensory stimuli fit together perfectly creates places full of harmony and ideal conditions for creativity. The Silence Point TouchDown models stand for much more than ergonomics, seating comfort and good acoustics. With a width 1210 mm, they are extremely space-saving. In addition to the choice of 12 fabric collections, three different design variants ensure design diversity. The lovingly fully upholstered walls are offered on one side or optionally also on both sides in a quilted version. Quilting options on request. There are 11 fabric collections with different characters and colours available for this purpose. The models are available with and without a writing tray.

SP TouchDown tray left H1400
Without quilting, on castors

Data Silence Point TouchDown

Wall thickness 40 mm

Substructure - dimensionally stable aluminum frame profile

Wall structure highly sound-absorbing according to DIN EN ISO 354

Filler Standard 100 by OEKO-TEX®

Walls fully upholstered with a smooth fabric surface

Seat and back upholstery always without quilting, removable cover

Feet in stainless steel, optionally powder-coated

12 fabric collections to choose from /
11 collections for quilting

Optional standard quilting option 114 partial.
Further quilting options on request

Optional quilting only on the outside or
outside and inside

Optional with castors

Model dependent:
Writing tray on the right or left, surface as per AOS decor card, optional Fenix black

Model overview - drawings

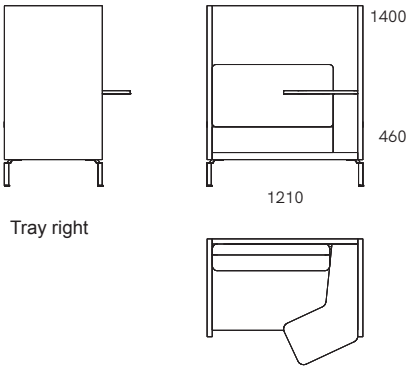

Tray right

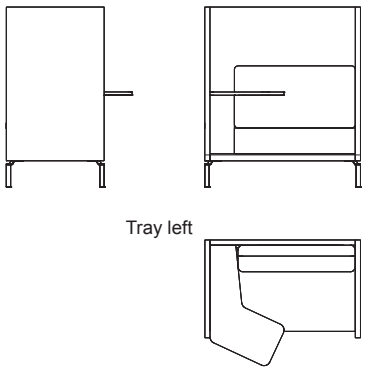

Tray left

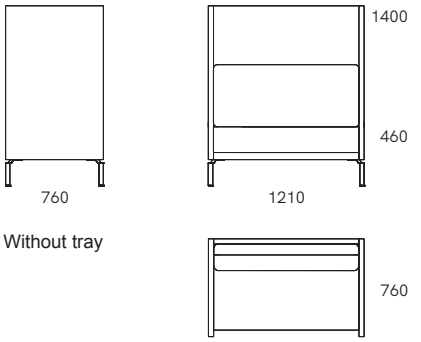

Without tray

Choice of fabric collections

PG1 Medley
PG2 Cura, Hush
PG3 Connect, Roccia, King L, Step, Step Melange
PG4 Blazer, Main Line Flax, Crisp
PG5 Passion

Quilting: PG4 Crisp not applicable

Finish

Without quilting

One-sided outside quilted

Quilted on both sides

Quiting options



Quilting 114 partial

Further quilting options on request

Wall construction 40 mm

Sound absorption coefficient ap per DIN EN ISO 354

125	Hz	ap 0,21
250	Hz	ap 0,37
500	Hz	ap 0,60
1000	Hz	ap 0,69
2000	Hz	ap 0,75
4000	Hz	ap 0,88

Rated sound absorption coefficient aw 0,65 (H).
DIN EN ISO 354 test certificate

Models on castors



Note: Models also available with castors

Standard weight in kg

Height / Version	1400
Standard	75
Tablar	80

Note: additional castors weight (4 castors, 2 of which have parking brakes) + 2.5 kg

AOS Akustik Office Systeme GmbH · Lenabergweg 5 · 91626 Schopfloch
Tel. +49 9857 97559-0 · Fax +49 9857 97559-29 · info@akustik-office-systeme.de · www.akustik-office-systeme.de

02.2025